

## Freestanding Model 1

### Product Description

A small form factor 5 stage reverse osmosis water purifier that can provide hot or cold water in spaces of 25 people or less.

### Product Specifications

<b>Water</b>	Hot and Cold
<b>Filter Stages</b>	Sediment, Pre-Carbon, RO, VOC Carbon, UV
<b>Finish</b>	Vacuum Formed Plastic and Coated Steel
<b>Power</b>	120 VAC 60hz
<b>Activation by</b>	Button Press
<b>Mounting Type</b>	Free Standing
<b>Chilling Capacity*</b>	5 GPH
<b>Cooling Power</b>	100W
<b>Heating Power</b>	1200W
<b>Dimensions (L x W x H)</b>	15" X 12" X 48"
<b>Approx. Shipping Weight</b>	45 lbs
<b>Installation Location</b>	Indoor only
<b>No. of People Served</b>	25 or fewer
<b>Water Dispense Rate</b>	0.8 GPM

\*Cooling Capacity s based on ASHRAE 18 Testing conditions with 80°F inlet water and 90°F Ambient temperature.

### OPTIONAL EARTHQUAKE BRACKET

Complies with ADA 308.2 accessibility requirements when installed according to the requirements outlined in these standards. Installation Instructions (PDF)

#### Product Certified to Below Standards

NSF/ANSI 42, 53, 58, 401, P472, 61 (Q<sub>s</sub>1), & 372 (lead free) by IAPMO R&T

UL 399 by SGS China



PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_


DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

# Freestanding Model 1

## Installation and Placement Drawings for the AquaTru Freestanding Model 1

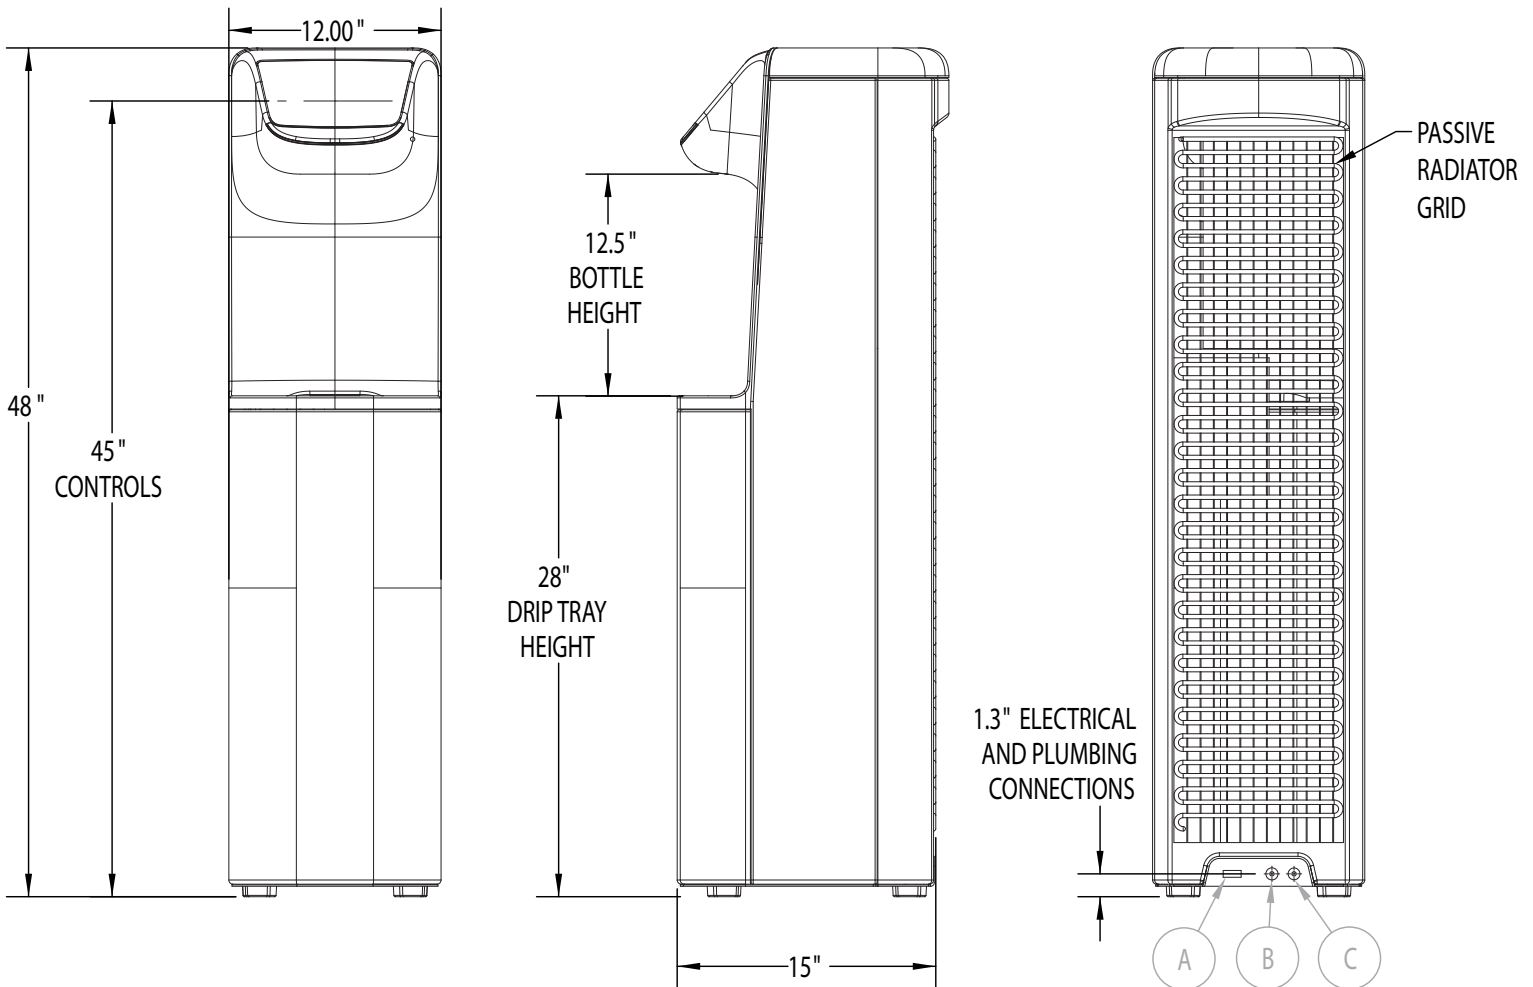

LEAVE AN ADDITIONAL 2" OF SPACE BEHIND THE UNIT FOR AIR FLOW AND ELECTRICAL AND PLUMBING CONNECTIONS

ALL PLUMBING CONNECTIONS ARE 1/4" QUICK CONNECT TYPE FITTINGS

- A. GROUNDED 120V 60HZ POWER
- B. WATER INLET (PLUMBED INTO MAIN)
- C. RO WASTE DRAIN LINE (MUST BE PLUMBED INTO MUNICIPAL SEWER)